

March 2023

LM-ADP-PR-SEN-P5/P6 & PR-SEN-P-CONN-01

(Packard Conn)

For use with MBE 9A4, 9M4, 9A8 & 9M8 ECUs


Pin outs

| Sensor Conn | Pin A | Pin B | Pin C |
|---------------------------|---------------------|-----------------|-----------------|
| | 0VA GREY/BLACK | +5V RED/PINK | Signal WHITE |
| ECU Pin (MBE9A4 & 9M4) | 5 or 23 or 24 ** | 4 or 22 ** | 27 * |
| ECU Pin (MBE9A8 & 9M8) | 5 ** | 4 ** | 27 * |

* This is a programmable pin on the 9A4, 9M4, 9A8 & 9MD ECUs, it must be configured using the Easimap 6 software for oil pressure input.

If occupied on SBD harnesses, remove the pin, insulate the pin & fit Signal wire on the new adaptor into Pin 27.

** May require splicing using the splices supplied within the kit.

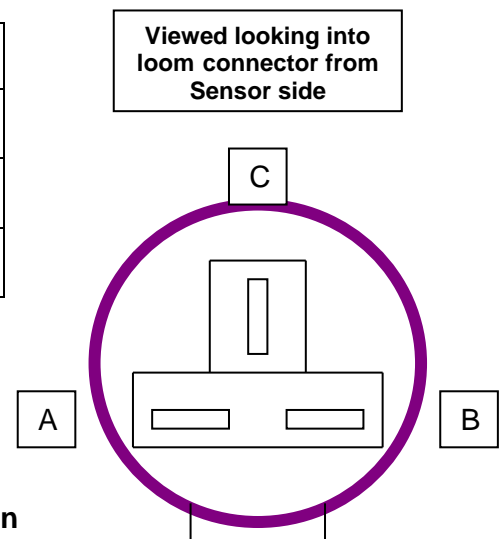

Free technical support is available on our website. If you require personalised technical support training, this is available at a chargeable rate.

SBD Motorsport Ltd
Unit 15, Red Lion Business Park, Red Lion Road, Surbiton,
Surrey. KT6 7QD
Tel: 0208 391 0121
Website: www.sbdmotorsport.co.uk

