


## LM-CONN-2P-M-K4 Fitting Instructions

If using with original Hayabusa throttles with standard injectors, you will need to add SBD part no: LM-CONN-2P-M-K to each of the standard injector connectors to enable you to plug into our wiring harness.


You will need the following tools and components:




1. Trim the covering tape from the injector harness to reveal the wires.

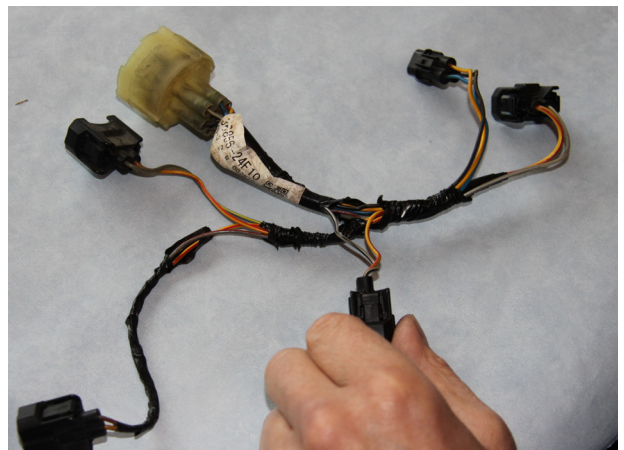


2. Cut each connector from the harness leaving 45mm of wire to allow the new connector to be fitted.

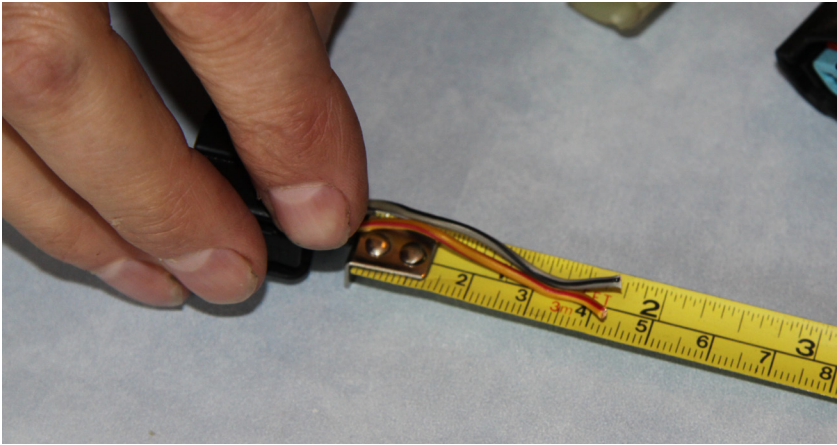


3. Strip approx 5mm of the covering insulation to expose bare wire. Crimp on the pins.

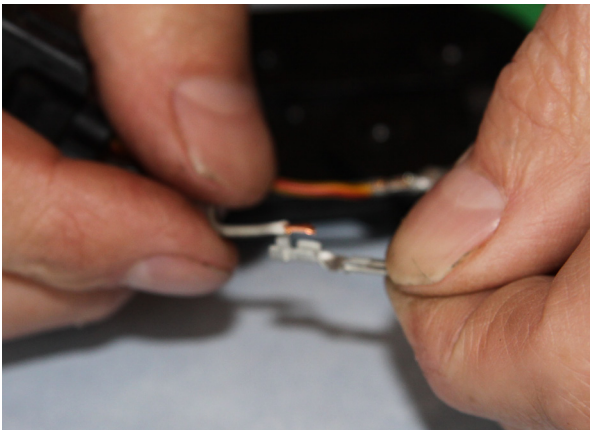


4. Put heat shrink over the wires before connecting to the new connector.

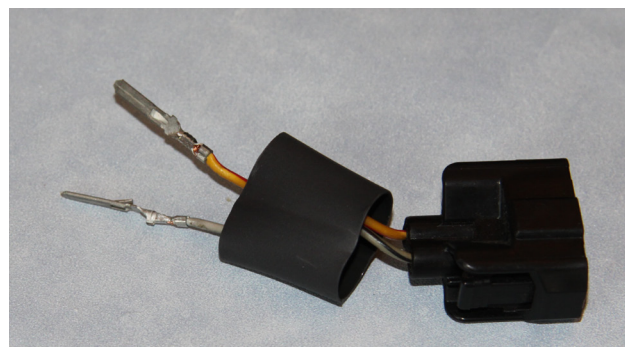


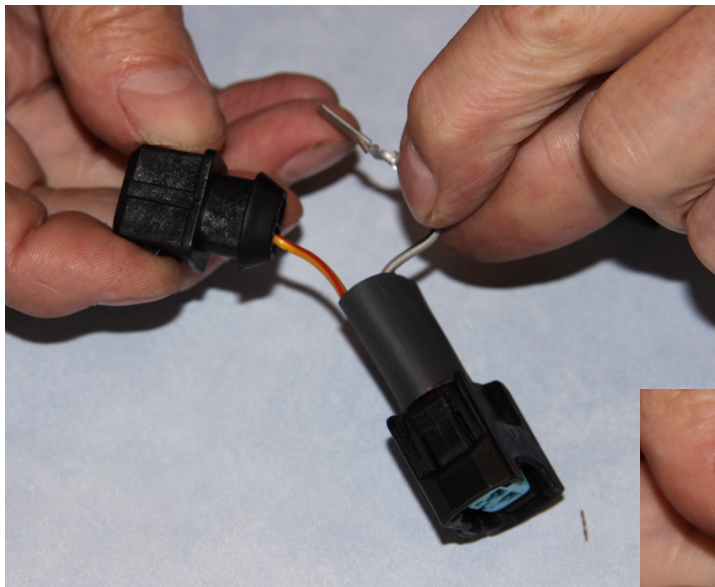


5. All the connectors have two wires, the 12v is the wire which is the same colour on all connectors, normally yellow with a red trace. Insert the terminals into the connector in the position shown below, ensuring that the terminals lock in.

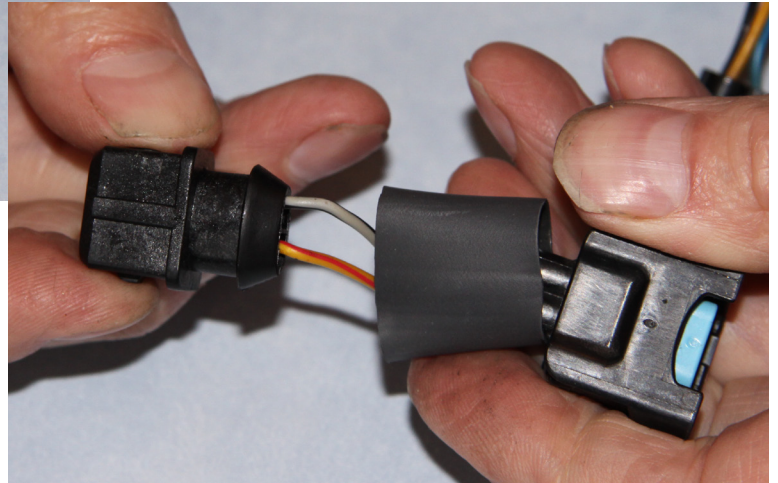

6. Twist wires together as shown.

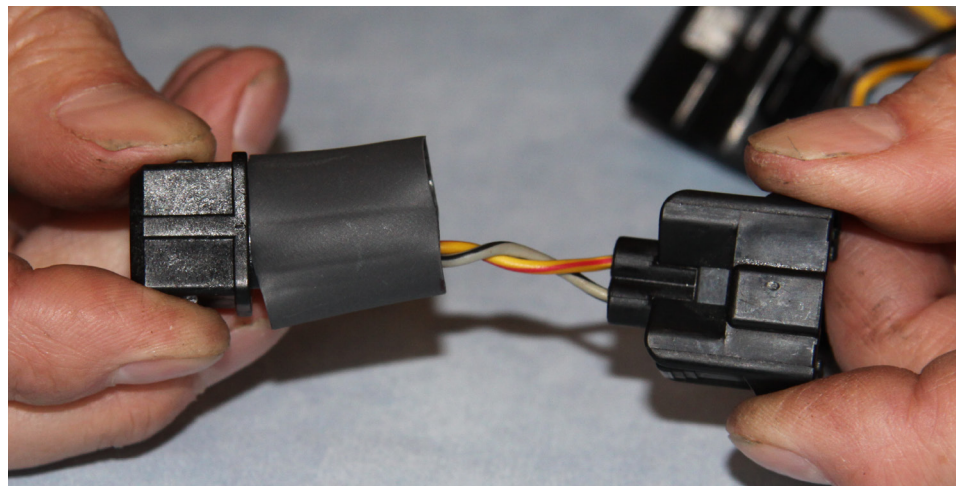

7. Move heat shrink in place and apply heat to shrink.

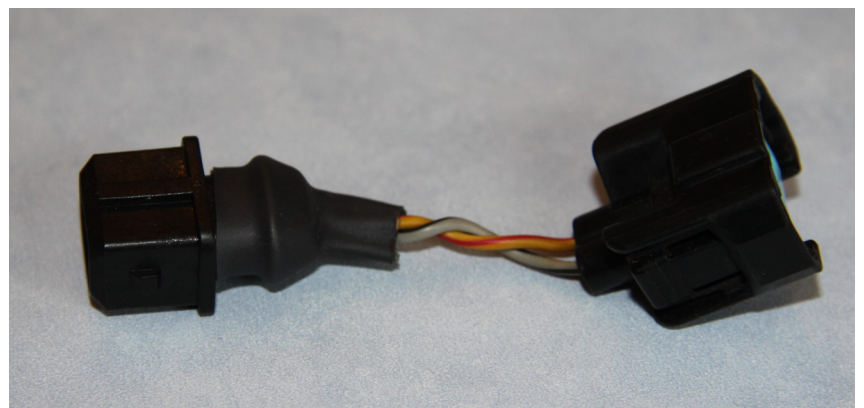

SBD Motorsport Ltd  
Unit 15, Red Lion Business Park, Red Lion Road, Surbiton, Surrey. KT6 7QD  
Tel: 020 8391 0121  
Email: [sbdmotorsport@btconnect.com](mailto:sbdmotorsport@btconnect.com)  
Website: [www.sbdmotorsport.co.uk](http://www.sbdmotorsport.co.uk)



SBDMotorsport



sbdevelopments



sbdmotorsport